
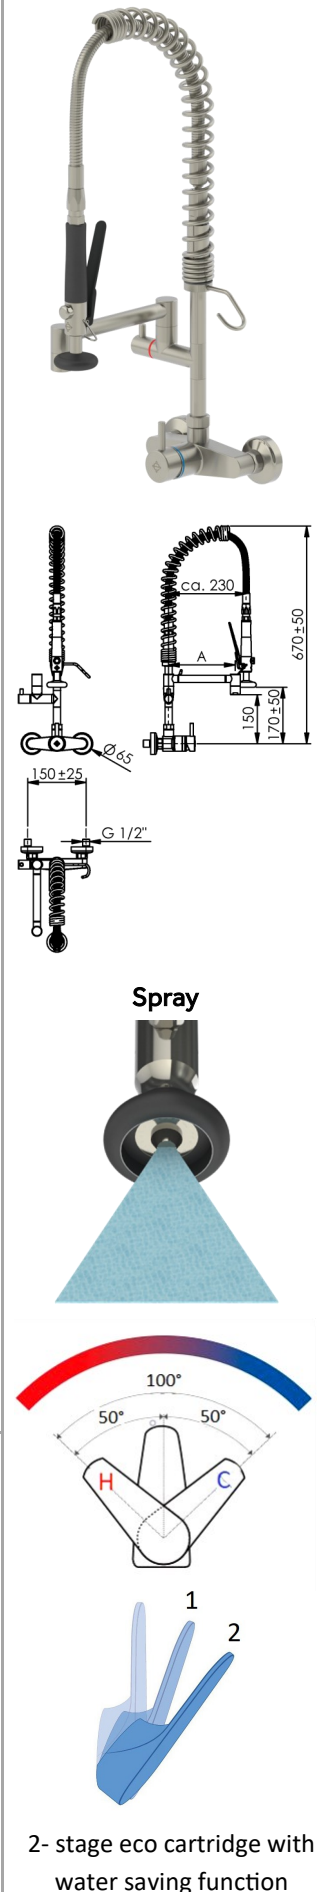


Description:	BistroLine pre- rinse Single-lever wall mounted tap 1/2"
Material:	Stainless steel
Item code:	382-202/200-150 382-202/250-150
Technical data:	· Mixer tap: Single-lever mixer · nominal size 1/2" · Operating pressure 1 - 6 bar (14.5 - 87 psi) · For high pressure only · Ceramic cartridge (mixer), Ceramic headworks (spout) · Heat insulating handles · Ergonomic stainless steel hand shower, low-impact thanks to integrated delayed closing mechanism · Flat spout A=200 / 250mm · Stainless steel spring · Stainless steel hook angled downwards for easy fixing and removal of the hand shower · High-performance stainless steel hose with ball joint for the mixer-tap, connector at the hand shower can be rotated 360°, 600mm long · Backflow preventer against circulation between hot and cold water, as well as back suction of dirty water · Installation: Wall mounting, centre-to-centre distance 150 mm ±25 mm via S-connection with G1/2" · Flow rate hand spray : 2,4 - 4,8 l/min (1 - 4 bar, 14.5 - 58 psi) · Flow rate swivel spout 15 - 27 l/min (2 - 4 bar, 14.5 - 58 psi) · Hot water resistant up to 80°C

Product description:	· Robust design All parts of the dishwashing spray are designed for use in commercial conditions · Extended working area Stainless steel support spring for a large working area · Spray with fan jet for optimum pre-rinsing results · Backflow preventer against circulation between hot and cold water, as well as back-suction of dirty water
----------------------	--

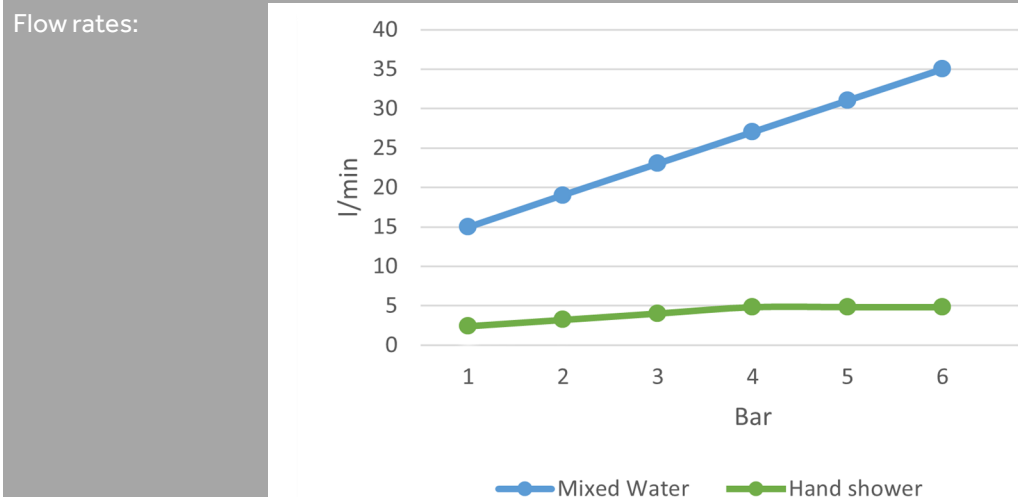

Bestimmungsgemäße Verwendung:	The fitting is used in commercial kitchens. The fitting must only be operated by trained specialist staff with a minimum age of 14 years. Assembly and disassembly may only be carried out by certified specialist tradesmen.	
Nicht bestimmungsgemäße Verwendung:	The fitting is not suitable for connection to low-pressure hot water boilers. The fitting must not be used to clean push-through dishwashers. There is a risk of damage to the hose from excessive pulling.	
Gefahrenhinweis:	In case of disassembly or repair the angle valves should be shut off. In order to prevent water damage, the mixer tap has to be closed outside business hours.	
Pflegehinweis:	Do not use cleaning agents with a high chlorine or acid content. Refrain from using high-pressure cleaning devices, as defined in work sheet VdF 018, for instance. No types of scouring agents are to be used for cleaning purposes as they scratch the surface.	
Zulassungen:	All seals meet the requirements for plastics in contact with water and the requirements of DVGW work sheet W 270. All solders are cadmium and lead free.	
Hersteller:	Gebr. Echtermann GmbH & Co.KG Bertholdstr.5 D 58644 Iserlohn Tel: +49 (0) 2371 / 9582-0 Fax: +49 (0) 2371 / 52787 Email: contact@echtermann.de	