

Designation:

Single-hole mixer tap 1/2"
with swivelling spout
Stainless steel


Material:

Article number:



201-105/140-060/02

Description:

- Designed for high pressure only, operating pressure 1-6 bar
- 360° swivelling spout
- Long control lever
- Projection A = 140mm
- Height H = 60 mm
- Flexible connection hoses M10x1 e.t. x Length 450mm, union nut 1/2"
- Easy-to-install fastening system 2x rod M6 x 60mm for worktop thickness of up to approx. 35 mm with enclosed mounting key
- Material **stainless steel**
- Hot water resistant up to 80°C
- Worktop bore hole Ø33 mm
- Optionally increased flow rate by 35% possible by replacing the jet regulator

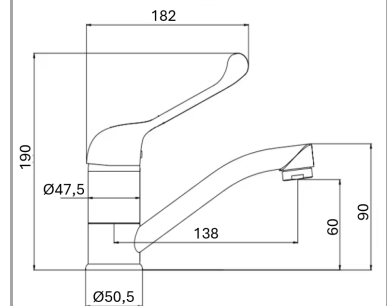

Flow rate:

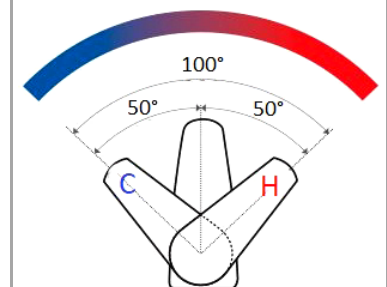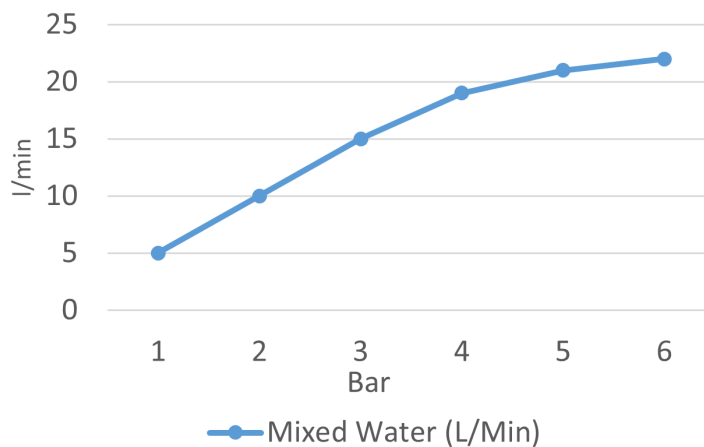

Proper use:	The fitting is used in commercial kitchens. The fitting must only be operated by trained specialist staff with a minimum age of 14 years. Assembly oder disassembly may only be carried out by certified specialist tradesmen.	
Improper use:	The fitting is not suitable for connection to low pressure hot water boilers. The fitting must not be used to clean push-through dishwashers. There is a risk of damage to the hose from excessive pulling.	
Hazard warning:	In case of disassembly or repair the angle valves should be shut off. In order to prevent water damage, the mixer tap has to be closed outside business hours.	
Care instruction:	Do not use cleaning agents with a high chlorine or acid content. Refrain from using high -pressure cleaning devices, as defined in work sheet VdF 018, for instance. No types of scouring agents are to be used for cleaning purposes as they scratch the surface.	
Admissions:	All seals meet the requirements for plastics in contact with water and the requirements of DVGW work sheet W 270.	
Manufacturer:	Gebr. Echtermann GmbH & Co.KG Bertholdstr.5 D 58644 Iserlohn Tel: +49 (0) 2371 / 9582-0 Fax: +49 (0) 2371 / 52787 Email: contact@echtermann.de	