

Designation:

**EcoStar- stainless steel 304 two handle 2-hole stand mixer tap with HU-spout
Stainless Steel**

Material:

720-201/255-120



Article number:

Technical data:

- Mixer tap: Two-handle mixer tap
- Nominal size 1/2"
- For high pressure only
- Operating pressure 1 - 6 bar (14.5 - 87 psi)
- Ceramic headworks (mixer)
- Heat-insulating handles
- 360° Swivelling spout
- Projection L= 254mm ,H = 120 mm,
- Non-return valves
- Hot water resistant up to 80°C
- Installation: Work Top Bore Holes 2x Ø23mm with distance dimension 150mm

Description:

Flow rate:

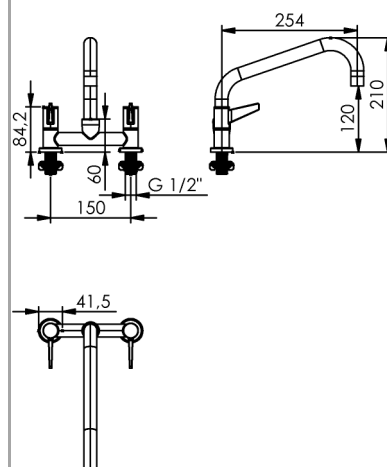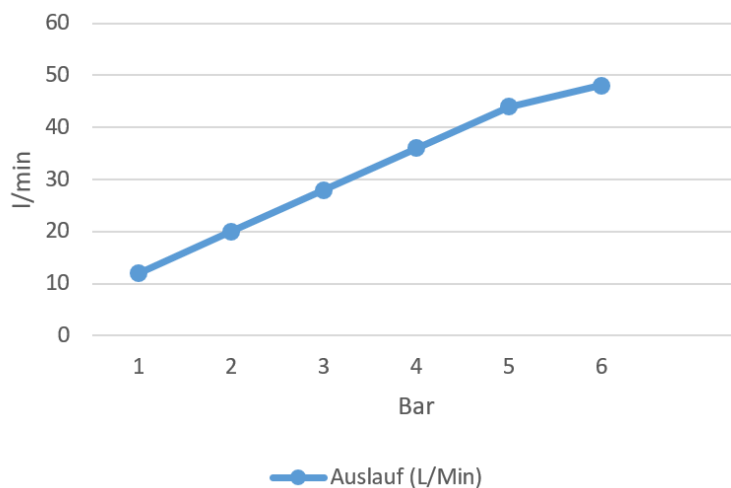

Proper use:	The fitting is used in commercial kitchens. The fitting must only be operated by trained specialist staff with a minimum age of 14 years. Assembly and disassembly may only be carried out by certified specialist tradesmen.	
Improper use:	The fitting is not suitable for connection to low-pressure hot water boilers. The fitting must not be used to clean push-through dishwashers. There is a risk of damage to the hose from excessive pulling.	
Warning:	In case of disassembly or repair the angle valves should be shut off. In order to prevent water damage, the mixer tap has to be closed outside business hours.	
Care instruction:	Do not use cleaning agents with a high chlorine or acid content. Refrain from using high-pressure cleaning devices, as defined in work sheet VdF 018, for instance. No types of scouring agents are to be used for cleaning purposes as they scratch the surface.	
Admissions:	All seals meet the requirements for plastics in contact with water and the requirements of DVGW work sheet W 270. All solders are cadmium and lead free.	
Manufacturer:	Gebr. Echtermann GmbH & Co.KG Bertholdstr.5 D 58644 Iserlohn Tel: +49 (0) 2371 / 9582-0 Fax: +49 (0) 2371 / 52787 Email: contact@echtermann.de	